

PI 95



WIŚNIEWSKI

GATES | WINDOWS | DOORS | FENCES

INDUSTRIAL SLIDING GATE PI 95

Intended use: PI 95 gates are perfect for all types of business activity. These gates are installed around industrial buildings, airports, ports, guarded car parks, as well as schools, kindergartens, shopping malls, etc. Sliding gates are also used on wide plots where the gate can slide along the fencing. The gates are also frequently used when the forecourt is short or if a hill prevents the use of double-leaf gates.



SAFETY

Manually-operated and power-operated PI 95 gates were awarded the CE mark which confirms their compliance with the provisions of the PN-EN 13241-1 standard for industrial and residential gates.



CANTILEVER

The PI 95 gate features a cantilever design. The leaf is seated on a 95x85 [mm] ground track and moves on carriages mounted to anchors fixed to the concrete foundation. The gate slides about 100 [mm] above the ground level. The gate leaf does not touch the ground.



CORROSION RESISTANT

PI 95 cantilever gates are secured against corrosion by hot-dip galvanizing or hot-dip galvanizing and coating with polyester paint. Duplex products are covered by our 5-year corrosion protection guarantee.



SOLUTION SYSTEM

PI 95 cantilever gates are a system of elements for access control. When used together with industrial segments, mesh panels (VEGA B, VEGA B Light, VEGA 2D Super, and VEGA 2D), posts, and double-leaf gates and wickets (BASTION, MODEST, GARDIA) they form a complete fencing system.



TAILORED TO INDIVIDUAL NEEDS

A BROAD RANGE OF DIMENSIONS:

- width range 3,500-7,000 [mm]
- height range 1,000-2,200 [mm]



LEAF HEIGHT (H) in [mm] to	WIDTH BETWEEN POSTS (So) in [mm] to							
	3500	4000	4500	5000	5500	6000	6500	7000
1000	+	+	+	+	+	+		
1200	+	+	+	+	+	+	+	+
1500	+	+	+	+	+	+	+	+
1700	+	+	+	+	+	+	+	+
2000	+	+	+	+	+	+	+	
2200	+	+	+	+				

INTENDED USE

The PI 95 cantilever sliding gate is intended for closing entrances with a clear opening width up to 7 metres, and if two gates installed opposite to one another are used (2x6m), an opening width up to 12 metres is possible.

Characteristics:

- 95 x 85 mm ground track,
- double guiding frame for manually-operated gates,
- a single receiver post (120x120),
- back frame for balancing the leaf when open (depending on the gate width ($S_0 > 6,000\text{mm}$ and/or $H > 2,000\text{mm}$),
- a power-operated gate with a drive integrated with the post closed with a cover,
- also available with an external drive.

RELIABLE CANTILEVER DESIGN


GROUND TRACK

The PI 95 gate features a cantilever design. The leaf is seated on a 95x85 [mm] ground track and moves on carriages.







EXAMPLE INFILLS AVAILABLE FOR CANTILEVER SLIDING GATES

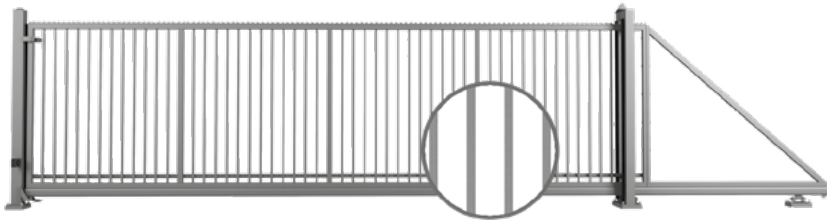


Sliding gate with an infill made of 25 x 25 [mm] box sections welded to the structure – view from the premises.

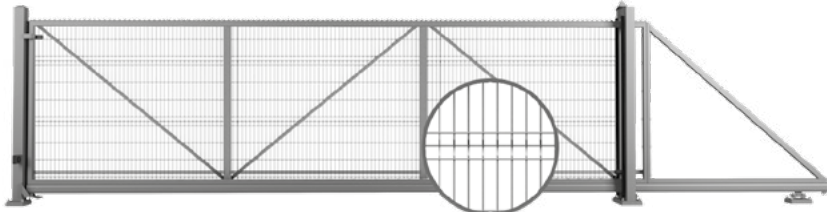

Sliding gate with an infill made of VEGA B mesh panels screwed to the structure – view from the premises.

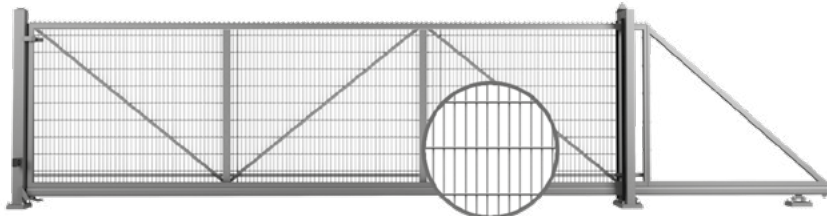


Sliding gate with an infill made of VEGA 2D Super mesh panels screwed to the structure – view from the premises.

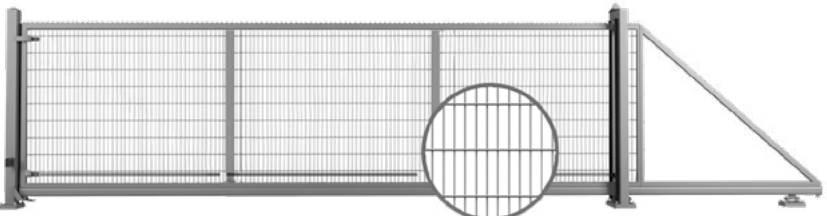

Sliding gate with an infill made of VEGA 2D Super mesh panels welded to the structure – view from the premises.

NEW

NEW SYSTEM INFILLS

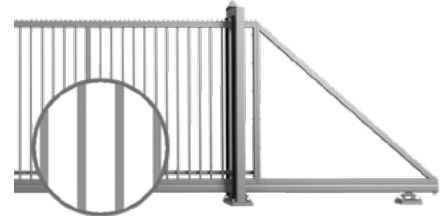

Round tube section infill \varnothing 25mm welded to the structure.

Also available as an extended infill.



Closed box section infill 25x25mm, CARO arrangement, welded to the structure.

Also available as an extended infill.



Closed box section infill 30x18mm, welded to the structure.

Also available as an extended infill.

MODULAR DESIGN

The PI 95 sliding gates are available in several infill designs.

The sliding gates are made of modules connected together with screws using fasteners designed and patented by WIŚNIOWSKI. The gate leaf up to 5,900 [mm] wide is a single module. In gates over 5,900 [mm] wide, the leaf comprises two modules. 60x40 [mm] sections are used for connecting the leaf modules. The assembly is screwed down to the ground track. This solution ensures superior corrosion protection, because individual modules are dipped in the galvanizing vat.

COLOURS

COLOUR RANGE

Standard gates are available in the hot-dip galvanized version or hot-dip galvanized plus polyester coating version.

Industrial gates are also available in other RAL colours.

RAL 5010	RAL 6005	RAL 7016
RAL 7030	RAL 9016	RAL 7040





RAL palette colours



SLIDING GATE TYPES

MANUALLY-OPERATED GATE

POWER-OPERATED GATE

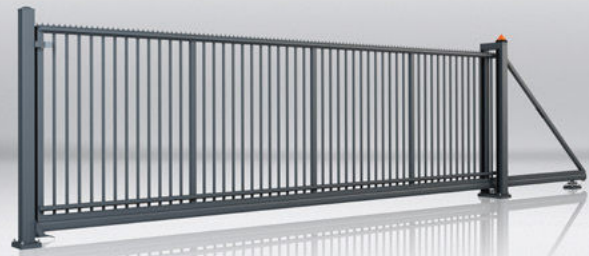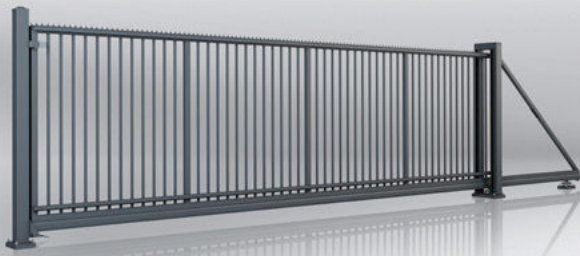

ACCESSORIES

COMFORT AND SAFETY

The PI 95 gates are available in manually-operated and power-operated versions. The automatic version is especially recommended for premises where the gate has to be frequently opened and closed. In this case, the automatic drive unit is a very comfortable solution. Depending on the required level of safety, the automatic gate is available in the Totmann (operated with a key switch) or the Automatik (operated with a remote control transmitter) version. The automatic version is fitted with 3 safety edges (Automatik 1) or 5 safety edges (Automatik 2).

The manually-operated version is fitted with a Locinox lock. In the automatic version, the automatic operating unit functions as the lock. Each PI 95 gate whose width exceeds 6,000 [mm] or whose height exceeds 2,000 [mm] is fitted with a back frame which supports the gate in an open position.

	THE TOTMANN VERSION	THE AUTOMATIK VERSION
STANDARD ACCESSORIES		
ACTUATOR	☑	☑
CENTRAL CONTROL UNIT	☑	☑
RADIO RECEIVER	-	☑
TRANSMITTERS FOR CONTROLLING THE DRIVE REMOTELY - 2 PCS.	-	☑
SIGNAL LAMP	☑	☑
EXTERNAL ANTENNA	-	☑
PHOTOCELLS - 1 SET	-	☑
KEY SWITCH WITH AN EMERGENCY STOP SWITCH	☑	☑
SAFETY EDGES (AUTOMATIK 1 - 3 SAFETY EDGES; AUTOMATIK 2 - 5 SAFETY EDGES)	-	☑
SIGNAL TRANSMISSION SYSTEM FOR TRANSMITTING THE SIGNAL FROM THE SAFETY EDGE INSTALLED ON THE LEAF	-	☑
DIRECTIVES AND STANDARDS		
THE PI95 GATES CARRY A CE MARKING IN ACCORDANCE WITH THE 2006/95/EC, AND 2004/108/EC DIRECTIVE ON BUILDING PRODUCTS AND COMPLY WITH THE EN 13241-1 STANDARD REQUIREMENTS.		
*) ADDITIONAL MODULES HAVE TO BE USED. ☑ STANDARD ACCESSORIES. ● OPTIONAL ACCESSORY. - NOT AVAILABLE.		

STRUCTURAL POST

The structural post of the automatic gates is fitted with a AWso2018 Pro drive installed under a cover locked with an espagnolette type lock. The automatic gate can also be fitted with an external drive. In this version, the drive unit plate is screwed to the structural post.

DRIVE UNIT INTEGRATED WITH THE POST (AWso2018 Pro)

A drive unit integrated with the post is a proven solution. The post protects the drive and the control unit against changeable weather conditions. The post lock secures the drive unit against unauthorized access and enables quick uncoupling of the drive in case of a power outage.





WIDTH RANGES FOR DRIVES

THE WIDTH RANGE IS MARKED WITH IN GREY

GATE TYPE	DRIVE UNIT MODEL	4,000	5,000	6,000	7,000
PI 95	BFT ARES ULTRA BT ⁽¹⁾				
	AWso2018 Pro				


DRIVE UNIT SPECIFICATION

GATE TYPE	DRIVE UNIT MODEL	MAX. NUMBER OF AC-TUATIONS PER HOUR ⁽²⁾	MOTOR SUPPLY	MAINS	POWER CONSUMPTION	TRAVEL SPEED
PI 95	BFT ARES ULTRA BT ⁽¹⁾	30	24V DC	230V AC	400 W	9 m/min.
	AWso2018 Pro	40	24V DC	230V AC	140 W	9 m/min

ORDERED AND DESIGN DIMENSIONS, AS WELL AS INSTALLATION DIMENSIONS

SLIDING GATE MOUNTING DIMENSIONS

The right hand gate, view from the premises (the ordered direction of the gate is the direction towards which the gate opens as seen from the premises).

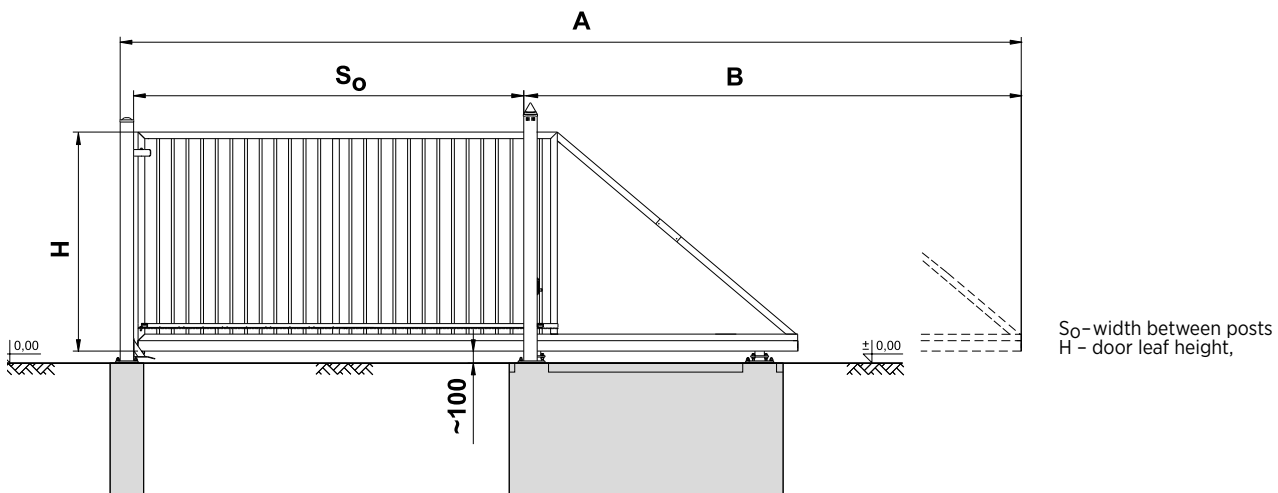

GROUND TRACK DIMENSIONS [mm]	GATE ORDERING WIDTH (S ₀) [mm] up to	CLEAR ENTRANCE WIDTH S _j [mm]. MANUALLY-OPERATED GATE OR TOTMANN	CLEAR ENTRANCE WIDTH S _j [mm]. AUTOMATIK GATE VERSION	GATE BOTTOM CLEARANCE [mm]	GATE STRUCTURE	SINGLE RECEIVER POST	TOTAL GATE LENGTH [mm]	TOTAL GATE LENGTH INCLUDING TRAVEL DISTANCE A IN [mm]
95x85	3,500	S _j =S ₀ -155 (+-10) mm	S _j =S ₀ -155 (+-10) mm	100	60x60	120x120	5,100	8,720
	4,000						5,800	9,920
	4,500						6,500	11,120
	5,000						7,000	12,120
	5,500						7,700	13,320
	6,000						8,200	14,320
	6,500						8,900	15,520
	7,000						9,400	16,520



GALLERY



BUILD AN EXTENSIVE INDUSTRIAL FENCING SYSTEM



WIŚNIEWSKI fences are a system of solutions ensuring comprehensive protection for your property. Our residential and industrial product range includes modern steel, profile, and panel fences. Reliable, high quality, and durable, our fences also boast an elegant and stylish look. WIŚNIEWSKI's comprehensive offer makes closing off your property simple and reflects great care for safety, security, and appearance.

TAKE ADVANTAGE OF OUR COMPLETE RANGE AND BUILD YOUR OWN FENCE.



FENCE SYSTEM WITH THE PI 95 SLIDING GATE WITH A WICKET, AND A 25 X 25 [mm] BOX SECTION INFILL



FENCE SYSTEM WITH THE PI 95 SLIDING GATE WITH A WICKET AND VEGA B MESH PANEL INFILL



WIŚNIEWSKI

GATES | WINDOWS | DOORS | FENCES

WIŚNIEWSKI Sp. z o.o. S.K.A.
PL 33-311 Wielogłowy 153
tel. +48 18 44 77 111
Fax +48 18 44 77 110

www.wisniowski.pl/en

N = 49° 40' 10" | E = 20° 41' 12"

Let us inspire you!
See other solutions from WIŚNIEWSKI!



The products shown in the pictures often feature special accessories and do not always correspond to their standard versions • The technical data sheet does not constitute an offer within the meaning of the Polish Civil Code • The manufacturer reserves the right to introduce changes without notice • NOTE: The colours shown in the technical data sheet are for reference only • All rights reserved • Copying and use, in part or in full, is prohibited without the consent of WIŚNIEWSKI Sp. z o.o. S.K.A. • P195/11.19/EN