



## Technical Data High-Speed Door NOVOSPRINT® Duo


View double-skinned door

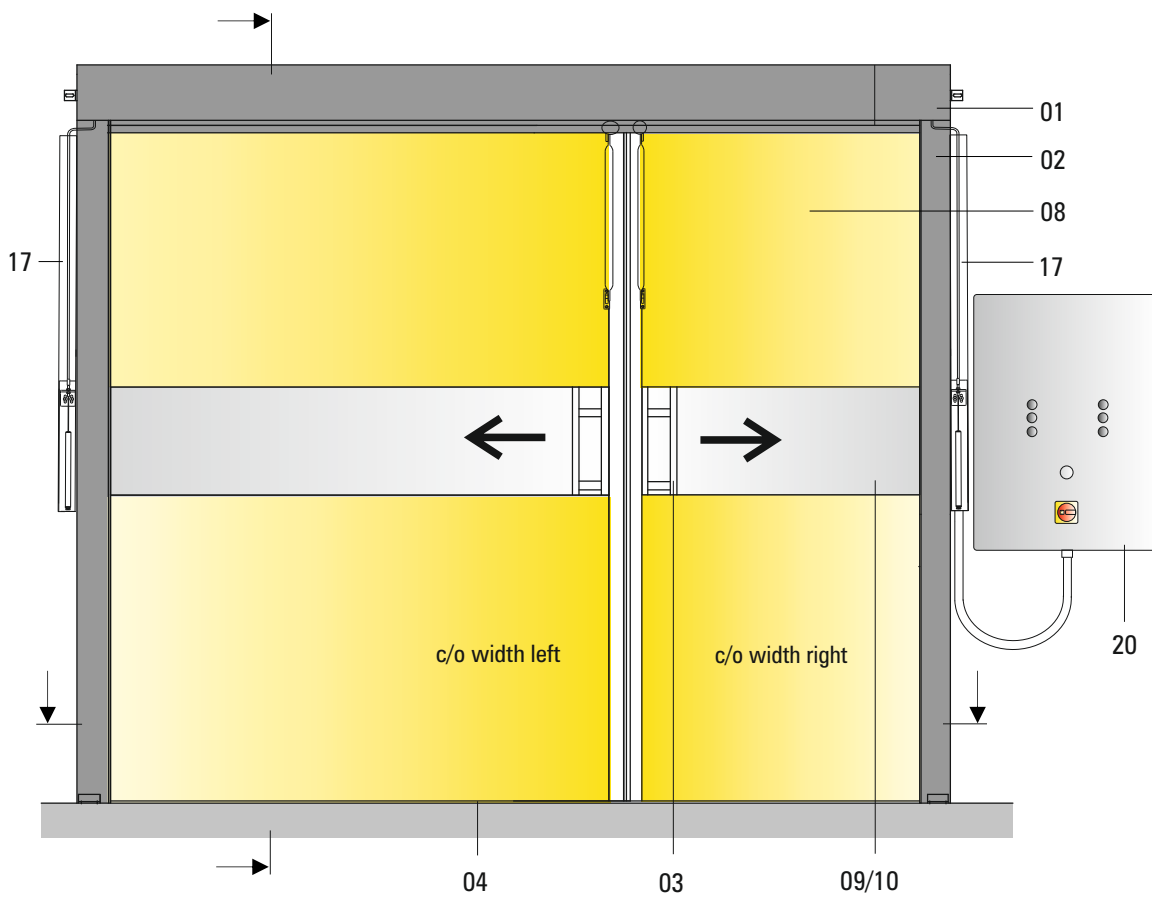

Vertical section

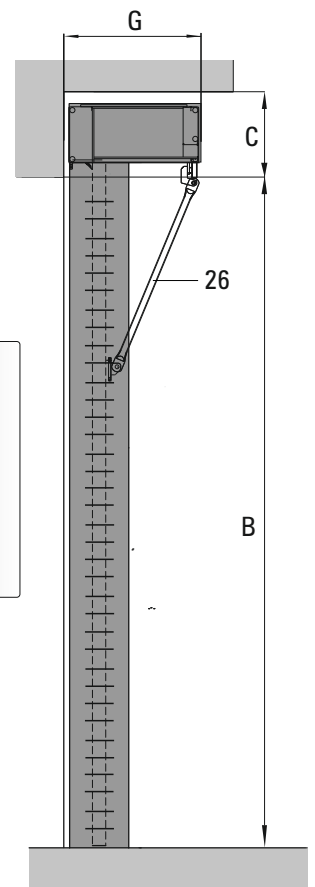

Horizontal section

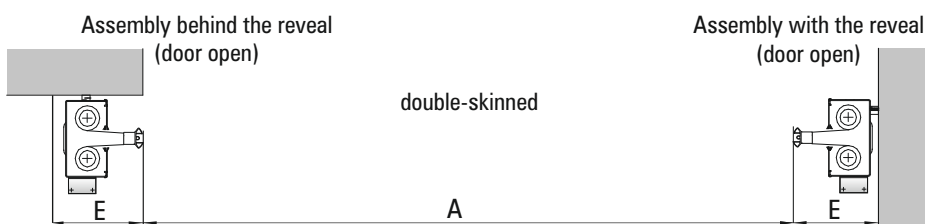

Dimension / Pos.	Technical Data High-Speed Doors NOVOSPRINT®		DUO	
	Technical state March 2020		single-skinned	double-skinned
	Use*	Interior door / exterior door (only applicable when installed together with an external door)	■ / -	■ / □
	Opening speed [m/s]*	Standard / optionally ultraspeed, depending on the size up to:	1.75 / 2.5 ( each side )	1.75 ( each side ) / -
	Closing speed [m/s]*	Standard / optionally integrated safety light curtain included, up to:	0.75 / 1.25 ( each side )	0.75 / -- ( each side )
	Opening cycles / operating time* One Cycle: Opening and closing = two load alternations	Total number of door cycles, annually typically up to:	350 000	350 000
		Maintenance interval, after max. no. of cycles/ intervals respect.	125 000 or annually	125 000 or annually
		No. of cycles, average [ 1 / hour ]	60	60
		Increased no. of cycles for max. 1 hour [ 1 / hour ]	120	120
		Increased no. of cycles for max. 15 minutes [ 1 / min ]	6	6
	Warranty on springs*	Generally for up to ..... cycles for max. 2 years	500 000	
A	Clear opening width [mm]	C/o width min. / max. standard skin (PVC). Values given in brackets upon request  width min. / max. for PVC-free, antistatical or food-safe door skin	1800 / 4500 / ( 5300 reinforced version ), single leaf max. 2650  1800 / 4300, single leaf max. 2150	
B	Clear opening height [mm]	C/o height min. / max. Values given in brackets upon request	1700 / 4500 / 5000 reinforced version      1700 / 4500	
C	Space requirement, top (lintel) [mm]*	Head section area	330	
D	Space requirement (non-drive side) [mm]*	Minimum (wall-mounted control system)	350	
E	Space requirement lateral (drive-unit side) [mm]*	Minimum (wall-mounted control system)	350	
F	Space requirement, lateral (drive-unit side) [mm]* for ground closure option	Minimum (wall-mounted control system)	410	
G	Required space, total depth [mm]*	Without additional equipment	520 (550)	
	Wind load [km/h] / Beaufort-class*	No performance defined, reference value acc. to DIN EN 12424 for double-skinned doors	--	50 - 100 / 6 - 10
	Air permeability	No performance defined, reference value acc. to DIN EN 12426	class 0	
	Resistance to water penetration	No performance defined, reference value acc. to DIN EN 12425	class 0	
	Airborne noise insulation Rw (C;Ctr) [dB]	Accord. to DIN EN ISO 717-1	--	7
	Operating forces / Safe opening	Accord. to EN 13241-1	fulfilled	
	Thermal insulation value Ud *	No performance defined, reference value acc. to DIN EN 12428 [W/m²K]	5,9	4,9
01	Door frame	Top : head section, horizontal made of sheet steel, powder-coated in black acc. to RAL 9005	■	
02		lateral : vertical jamb housing made of sheet steel, powder-coated in black acc. to RAL 9005	■	
03		Door-skin carrier powder-coated in black acc. to RAL 9005	■	
04	Ground closure	Lowering the door leaf when closed (be aware of enlarged door widths)	□	□
05	Drive unit	Worm gear motor with double brake (incl. emergency handle - normally closed)	■ (2x)	
06		Worm gear motor with double brake (without emergency handle - currentless opening)	□ (2x)	
07		Electric motor incl. frequency converter - driving power [kW]	0.75 kW (2x)	
08	Door skin*	PVC-coated polyester fabric on both sides yellow colour similar to RAL 1003	■	
09		Horizontal vision elements made of PVC height 520mm (1480mm - 2000mm )	■	
10		Horizontal vision element made of PVC in special heights up to 1000mm (also available with or without multiple vision fields)	□	
11		Printed door-skin according to digital file (e.g. .jpg)	upon request	
12		On both sides PVC-coated polyester fabric in special colour	□	
13		PVC-free design (similar to RAL 1003)	□	
14		Food safe TPU-coating, similar to FDA (similar to RAL 1003)	□	
15		Antistatic design (similar to RAL 1003)	□	
16		Flame retardant design (Building material grade DIN 4102 - B1)	□	
17	Emergency opening	Via Bowden cable - automatic opening Note: The door may be pushed completely open manually, if required.	■ (2x)	
18		Automatic opening if currentless (Note: The door may be pushed completely open manually, if required).	□ (2x)	
19	Escape routes and rescue paths	Suitable for use in escape routes and rescue paths, in accordance with DGUV 208/044. Only valid for Germany: An approval in accordance with the provincial law may be required in specific cases. <b>Max. door height 3.5m</b> , larger heights upon request	--	--
20	Control system	BDC E800 F - frequency converter control for a soft start-up and a higher speed, power supply 230V / 50Hz (L1,N,PE), pre-fuse 16A C-characteristic, residual current-operated circuit breaker type B only	■ 2 pieces, built-in in case size 600x800x250 electrical connection 3x400V/N/PE, pre-fuse 16A C-characteristics, residual current-operated circuit breaker type B only	
21		4 kW frequency converter control, power supply 400V / 50Hz (3,N,PE), 16 A pre-fuse C-characteristics, residual current-operated circuit breaker type B only	--	
22	Safety	Optoelectronic safety edge control integrated in the door leaf, power supply via energy chain or trailing cable (Novo Syncro L + XL including radio transmission)	■	
23		Optoelectronic light curtain integrated in the door leaf, power supply via energy chain or trailing cable	--	
24		External photo eye	□	
25		External light curtain	□	
26		Anti-crush protection (stay bar with unlatch mechanism)	□	
27		Laser sensor	□	
28	Options	Pulse transmitter: Mushroom button / radar-sensor/ pull switch / radio control	□	
29		Pulse transmitter: Reflection light scanner / Radar motion sensor / Induction loop detectors	□	
30		Airlock control systems	□	
40		Combination with Spacelite stacking doors	□	
		* Depending on door size and equipment *** guide value, the value may differ i.e. may be much higher or lower in dependance of the operating conditions	■ standard □ available -- not available / not defined	