



Technical Data High-Speed Door NOVOSPRINT® Syncro L


View of double-skinned door

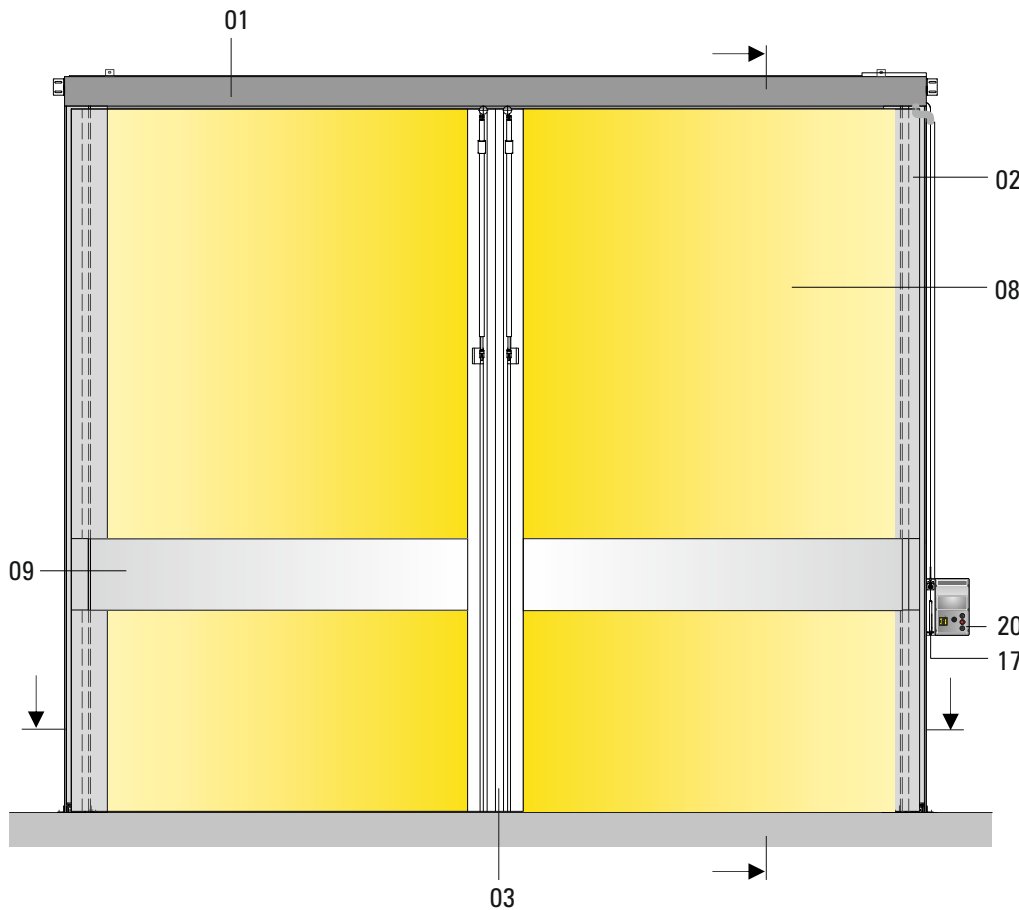

Vertical section

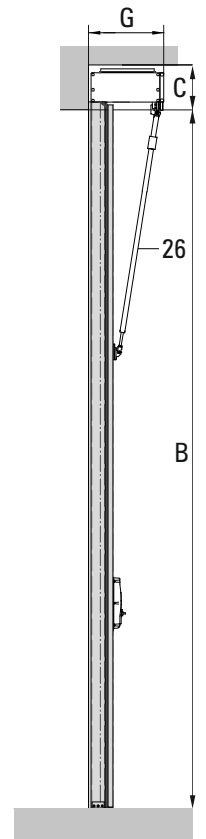

Horizontal section

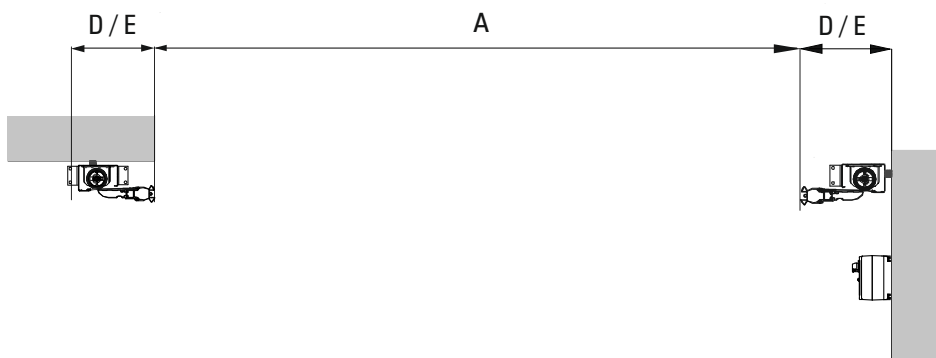

Assembly behind the reveal
 (door open)

Assembly within the reveal
 (door open)

Dimension / Pos.	Technical Data High-Speed Doors NOVOSPRINT®		Syncro L
	Technical state March 2020		single-skinned
	Use*	Interior door / exterior door (only applicable when installed together with an external door)	■ / --
	Opening speed [m/s]*	Standard / optionally ultraspeed, depending on the size up to:	2.5
	Closing speed [m/s]*	Standard / optionally integrated safety light curtain included, up to:	1.5
	Opening cycles / operating time* One Cycle: Opening and closing = two load alternations	Total number of door cycles, annually typically up to:	350.000
		Maintenance interval, after max. no. of cycles/ intervals respect.	125.000 or annually
		No. of cycles, average [1 / hour]	60
		Increased no. of cycles for max. 1 hour [1 / hour]	120
	Warranty on springs*	Increased no. of cycles for max. 15 minutes [1 / min]	6
		Generally for up to cycles for max. 2 years	500000
A	Clear opening width [mm]	C/o width min. / max. standard skin (PVC), Values given in brackets upon request	(2400) 3000 / 5500
		width min. / max. for PVC-free, antistatikal or food-safe door skin	(2400) 3000 / 4300
B	Clear opening height [mm]	C/o height min. / max. Values given in brackets upon request	2100 / 5100
C	Space requirement, top (lintel) [mm]*	Head section area	330
D	Space requirement (non-drive side) [mm]*	Minimum (wall-mounted control system)	410
E	Space requirement lateral (drive-unit side) [mm]*	Minimum (wall-mounted control system)	410
F	Space requirement, lateral (drive-unit side) [mm]* for ground closure option	Minimum (wall-mounted control system)	--
G	Required space, total depth [mm]*	Without additional equipment	550
	Wind load [km/h] / Beaufort-class*	No performance defined, reference value acc. to DIN EN 12424 for double-skinned doors	--
	Air permeability	No performance defined, reference value acc. to DIN EN 12426	class 0
	Resistance to water penetration	No performance defined, reference value acc. to DIN EN 12425	class 0
	Airborne noise insulation Rw (C;Ctr) [dB]	Accord. to DIN EN ISO 717-1	--
	Operating forces / Safe opening	Accord. to EN 13241-1	fulfilled
	Thermal insulation value Ud *	No performance defined, reference value acc. to DIN EN 12428 [W/m²K]	5.9
01	Door frame	Top : head section, horizontal made of sheet steel, powder-coated in black acc. to RAL 9005	■
02		lateral : vertical jamb housing made of sheet steel, powder-coated in black acc. to RAL 9005	■
03		Door-skin carrier powder-coated in black acc. to RAL 9005	■
04	Ground closure	Lowering the door leaf when closed (be aware of enlarged door widths)	--
05	Drive unit	Worm gear motor with double brake (incl. emergency handle - normally closed)	■
06		Worm gear motor with double brake (without emergency handle - currentless opening)	□
07		Electric motor incl. frequency converter - driving power [kW]	1.5 kW
08	Door skin*	PVC-coated polyester fabric on both sides yellow colour similar to RAL 1003	■
09		Horizontal vision elements made of PVC height 520mm (1480mm - 2000mm)	■
10		Horizontal vision element made of PVC in special heights up to 1000mm (also available with or without multiple vision fields)	□
11		Printed door-skin according to digital file (e.g. jpg)	upon request
12		On both sides PVC-coated polyester fabric in special colour	□
13		PVC-free design (similar to RAL 1003)	□
14		Food safe TPU-coating, similar to FDA (similar to RAL 1003)	□
15		Antistatic design (similar to RAL 1003)	□
16		Flame retardant design (Building material grade DIN 4102 - B1)	□
17	Emergency opening	Via Bowden cable - automatic opening Note: The door may be pushed completely open manually, if required.	■
18		Automatic opening if currentless (Note: The door may be pushed completely open manually, if required).	□
19	Escape routes and rescue paths	Suitable for use in escape routes and rescue paths, in accordance with DGVU 208/044. Only valid for Germany: An approval in accordance with the provincial law may be required in specific cases. Max. door height 3,5m , larger heights upon request	--
20	Control system	BDC E800 F - frequency converter control for a soft start-up and a higher speed, power supply 230V / 50Hz (L1,N,PE), pre-fuse 16A C-characteristic, residual current-operated circuit breaker type B only	■
21		4 kW frequency converter control, power supply 400V / 50Hz (3,N,PE), 16 A pre-fuse C-characteristics, residual current-operated circuit breaker type B only	--
22	Safety	Optoelectronic safety edge control integrated in the door leaf, power supply via energy chain or trailing cable (Novo Syncro L + XL including radio transmission)	■
23		Optoelectronic light curtain integrated in the door leaf, power supply via energy chain or trailing cable	--
24		External photo eye	□
25		External light curtain	□
26		Anti-crush protection (stay bar with unlatch mechanism)	■
27		Laser sensor	□
28	Options	Pulse transmitter: Mushroom button / radar-sensor/ pull switch / radio control	□
29		Pulse transmitter: Reflection light scanner / Radar motion sensor / Induction loop detectors	□
30		Airlock control systems	□
40		Combination with Spacelite stacking doors	--

* Depending on door size and equipment
*** guide value, the value may differ i.e. may be much higher or lower in dependence of the operating conditions

■ standard
□ available
-- not available / not defined